




Email: info@mpforni.it - Web: www.mpforni.it - Tel./Fax: (+39) 0874 309036



ROTATING GAS OVEN

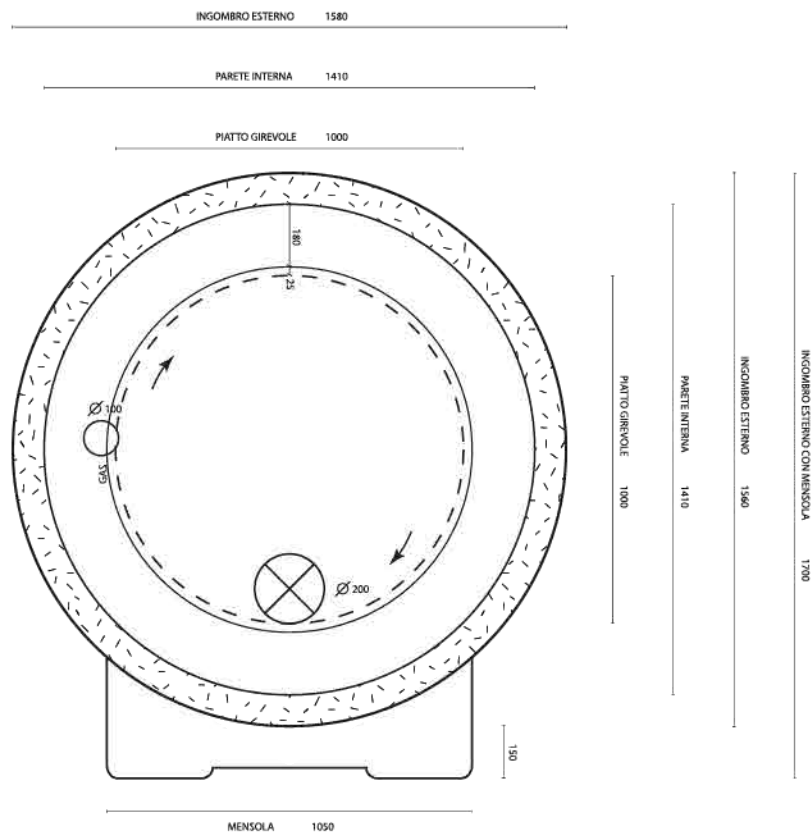


OPTION ROTATING GAS OVEN

All our ovens are artisanal, customized and handcrafted.
Therefore, the dimensions indicated are to be considered with an accuracy of +/- 2cm.

	80	100	120
a	1360	1560	1780
b	800	1000	1200
c	980	1050	1200
d	1360	1700	1900
e	310	370	480
wt.	1100 kg	1500 kg	1900 kg

In Plant View
Sizes Expressed in Millimeters

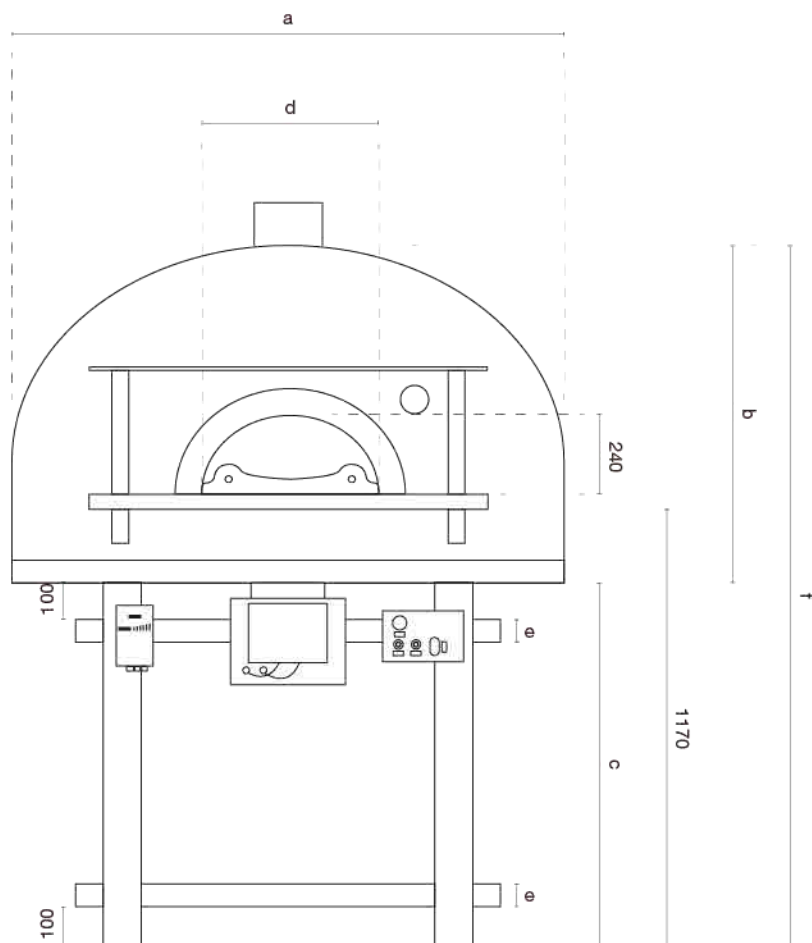

OPTION ROTATING GAS OVEN

All our ovens are artisanal, customized and handcrafted.
Therefore, the dimensions indicated are to be considered with an accuracy of +/- 2cm.

	80	100	120
a	1360	1560	1780
b	830	1000	1130
c	970	910	810
d	450	520	520
e	40	40	50
f	1800	1900	1940

In Frontal View
Sizes Expressed in Millimeters



GENERAL SPECIFICATIONS:

Support stall:	Painted steel.
External Finishing:	Mosaic on demand.
External extractor:	External extractor in one whole unit, defined by a double shaped steel chamber on the dome and forms the final joint between the fumes and the dome.
Cooking hob:	White platelets 40x40 cm thermo resistant 1200 °C.
Understack:	Panel of silicate lime(Monticellite), expanded clay and refractory cement.
Crown and dome:	White-brick material, thermal resistance 1700 °C.
Thermal insulation:	Refractory mortar, bra-ceramic, expanded clay, electro-welded mesh. Wall thickness 18cm. External wall material: Concrete with cement and refractory grains. Insulating material: Ceramic fibre; d=90kg/m ³ ;s=25mm. Thermal resistance to fire R = T 450°C. Distance from combustible materials: 5 cm. Incidental contact Maximum surface temperature 30 °C
Power supply:	Wood / Gas / Combined (Wood+Gas) All our gas ovens can also be used in wood with the necessary diligence. Our wood-fired ovens are already prearranged to be installed, also in a the second time, of the gas supply system without any problem, and without making any structural changes to the oven.
Nominal thermic output:	25000 kcal. - 29 kw.
Max. heating capacity:	29000 kcal. - 34 kw.
Operating temperature:	350°C / 450°C.
Temperature of fumes outlet:	190°C.
Chimney pipe:	Ø 200mm.
Flue Flow-rate:	800mc/h ignition. 650Mc/h at full speed.
Ejection of fumes:	Natural draught.

The materials used are free from toxic substances such as lead and asbestos.

The "consumption" of gas and wood refer to pizza oven at baking temperature and is approximate as it is caused by various factors:
tilting of the dough; seasoning of the cheeses; type of wood and state of humidity; smoke draught.

N.B. the heating phase of the oven has a higher consumption.

Possible connections of the oven to the flue pipe and of the burner to the grid of distribution must be carried out and certified by a specialist your technician.

The oven must have a dedicated flue pipe and there must be no other systems connected.

N.B The first ignition of the oven requires gradual heating.



SPECIFICATIONS OF GAS-FIRED SYSTEMS:

Operating temperature - burner:	FROM 0°C TILL 500°C.
Flue Flow-rate:	650mc/h ignition. 500Mc/h at full speed.
Ejection of fumes:	Natural draught.
Gas pressure:	Methane: from 10mbar- to 25mbar / 18 mbar. To 25mbar. GPL: from 25mbar- to 37mbar / from 20mbar- to 35mbar.

Direct connection to the gas detector required:
½" Tubes for installation keep a distance of 5 meters from the meter from the detector.
1" tubes for installation keep a distance of more than 5 meters from the detector.

MULTI-GAS ATMOSPHERIC BURNER

P Series

Manual control board

The manual P series does not require power supply (built-in batteries).



Serie D

Digital control panel.

Power supply:
220V-50/60 Hz mono-phase.

P1 Plus

Oven Mp 80 Rotating Plate

GPL consumption: 0,86 kg/h.
Methane consumption: 1,58mc/h kw 24 kcal /h 20.640.

P2

Oven Mp 100/120 Rotating Plate

GPL consumption: 1,22 kg/h.
Methane consumption: 1,75 mc/h kw 34 kcal /h 29.200

D1/M

Oven Mp 80 Rotating Plate

GPL consumption: 0,86 kg/h.
Methane consumption: 1,50 mc/h kw 24 kcal /h 20.640.

D2/M

Oven Mp 100/120 Rotating Plate

GPL consumption: 1,22 kg/h.
Methane consumption: 1,75 mc/h kw 34 kcal /h 29.200.

Drago Six

Oven Mp 100/120 Rotating Plate

GPL consumption: 1,22 kg/h.
Methane consumption: 1,75 mc/h kw 34 kcal /h 29.200.
Booster Functionality





Email: info@mpforni.it - Web: www.mpforni.it - Tel./Fax: (+39) 0874 309036

SPIT FIRE" AIR-BLOWN BURNER:

MILLBERG SPIT FIRE

Silver Spit Fire

Electronic modulating burner with blower.

Oven Mp 100/120 Rotating Plate

GPL consumption: 0,65 kg/h.

Methane consumption: 1,05 mc/h kw 25.

GOLD 29 Spit Fire

Oven Mp 120 Rotating Plate

GPL consumption: 0,90 kg/h.


Methane consumption: 01,25 mc/h kw 29.

GOLD 34 SPIT FIRE

Oven Mp 120 Rotating Plate

GPL consumption: 1,05 kg/h.

Methane consumption: 01,35 mc/h.

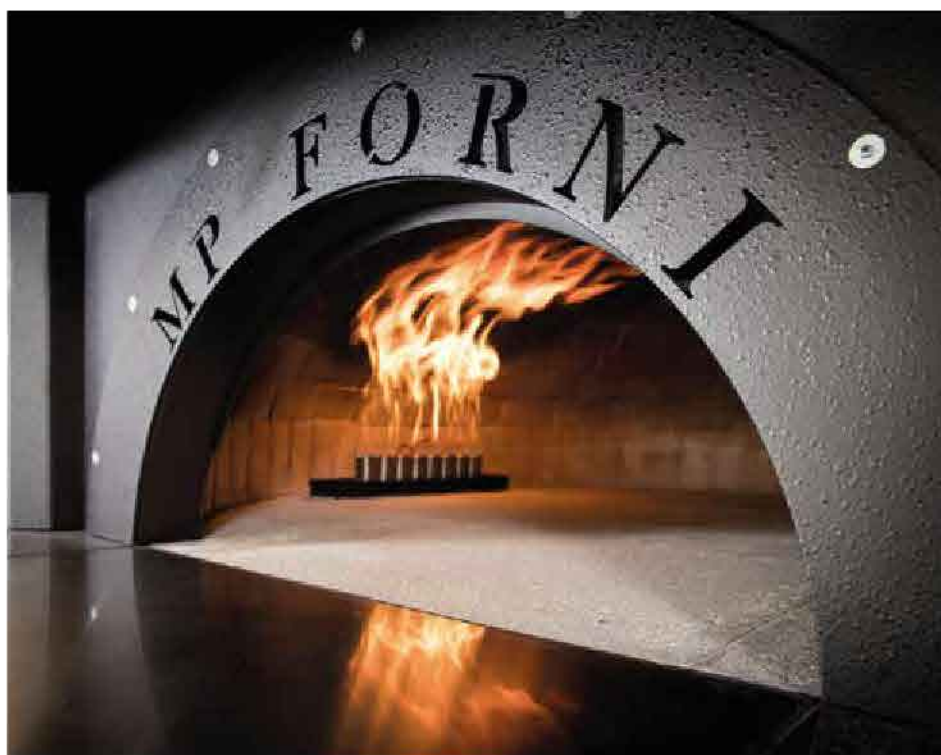

ROTATING GAS OVEN

